


DATA SHEET



PCA-DS-013

PRMT - RED ANTI-TRACKING MASTIC

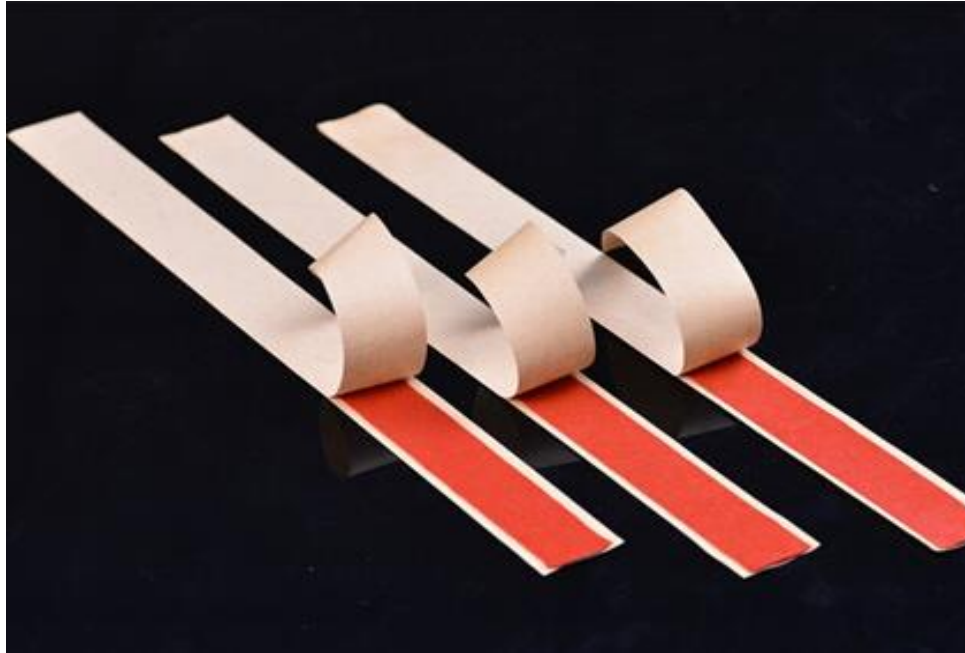

Typical Application: MV Cable Terminations & Joints

It is a low temperature track resistant sealant, electrically insulating and flexible at low temperatures.

It is used when a seal is required between heatshrinkable components and cable substrates.

Test Parameters	Test Method	Test Requirement
Tensile strength	ASTM D 638	0.1 Mpa
Ultimate elongation	ASTM D 638	>1000 %
Dielectric strength	IEC 250	>15 kV/mm
Density	ASTM D 792	1.2 g/cm ³
Dielectric constant	IEC 250	3 max.
Volume resistivity	ASTM D 527	10 ¹³ Ω.cm
50 Hz loss factor	-	0.035
Service temperature (max)	-	-20 to +90 °C
Adhesive and self-amalgamation	-	Good

DATA SHEET



PCA-DS-013

PRMT - RED ANTI-TRACKING MASTIC

DIMENSIONS:

Width (mm)	Length (mm)
35	100
35	150
35	200
35	300
35	400
35	600